



DRS 2400 SERIES

www.dooras.com

COVER OPTIONS









(Optionally, there is an aluminum controlled lance option. TS 3145 Certificated)



DRS 2400

- Flat Fire Hose, TS 9222 Certificated
- 2" Fire Valve (Brass). TS 12259 Certificated
- 2" Internal Threaded Union (Aluminum Storz Type) TS 12258 Certificated
- 2" Hose Union (Aluminum Storz Type), TS 12258 Certificated
- Movable hose basket with 90 ° angle of motion
- "Swivel Head Controlled Lance" with Jet, Spray and Off positions (EN 671-2 compliant)
- 6Kg, Dry Chemical Powder Fire Extinguisher Tube (ABC Class) TS862-7 EN3 Certificated
- Hose Basket Phosphate Coating, Completely Electrostatic Powder Painted.
- Products are shipped with cardboard packaging after tested hundred percent.
- Optionally, there is an aluminum controlled lance option. TS 3145 Certificated
- All Hose Connections are done with Special Press Method. Clamp etc. is never used.
- All hose connections are covered with plastic to prevent the damage to user.
- 2.5" Option is offered in all products.

PRODUCT TECHNICAL SPECIFICATIONS


DISASSEMBLED COVER

- A1 Quality Sheet Metal Production, Disassembled Sheet Metal or Glass Cover
- Recessed Handle (Corrosion Resistant Stainless)
- 180° Openable, Recessed-Hidden Hinge System (Corrosion Resistant Stainless)
- 4mm, Smoked Color or Black Painted Tempered Glass on Glass Covers
- Warning Signs and Signs in ISO 7010 Standards on the Cover (Tear-Free and Nonfading)
- Cover Phosphate Coating with Red or White Electrostatic Powder Painted.
- Optional Color and Design Options (Ral Codes for customer requests)
- Optional, Completely Stainless CrNi Material Options are available.


CASE

- A1 Quality Manufactured as a single piece of sheet metal, Recessed or Surface Mounted Case
- Vertically Positioned 2 pieces 6kg Fire Tube Capable Capacity
- Breakable Valve Connection Caps on Side, Top and Back Surfaces of the Case
- Case Design Suitable for Right and Left Handed Reels
- Reinforced Reel / Basket Carrying Console on Both Side Walls of Case
- Mounting, Ventilation and Water Drain Holes
- Case Phosphate Coating with Red or White Electrostatic Powder Painted.
- Optional Color and Design Options (Ral Codes for customer requests)
- Optional, Completely Stainless CrNi Material Options are available.
- Tear-proof, Nonfading, PVC Operating Instructions are available on the Case.

DRS 2400 DOUBLE DOOR FIRE CABINETS WITH LAY FLAT HOSE - WITH 2 FIRE EXTINGUISHERS HELD UPRIGHT

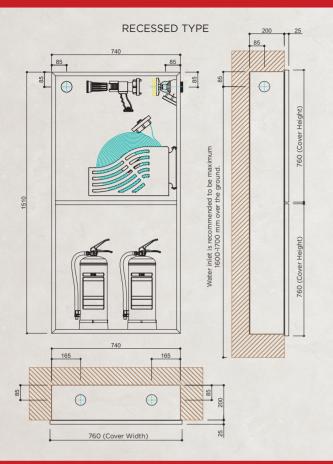

RECESSED TYPE

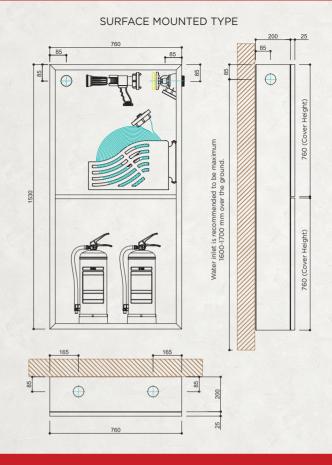

		MODEL	PRODUCT DESCRIPTION	CASE TYPE	CASE DIMENSIONS (mm)	COVER OPTIONS
	2" Flat Hose	DRS2420.2RT_	2"-20m Flat Hosed, Double Cover, Double Tubed Fire Cabinet	Recessed	740x1510x200	T1,T2,T3,T4
		DRS2430.2RT_	2"-30m Flat Hosed, Double Cover, Double Tubed Fire Cabinet		740x1510x200	
	2 ½" Flat Hose	DRS2420.3RT_	2½"-20m Flat Hosed, Double Cover, Double Tubed Fire Cabinet	Recessed	740x1510x220	T1,T2,T3,T4
		DRS2430.3RT_	2½"-30m Flat Hosed, Double Cover, Double Tubed Fire Cabinet		740x1510x220	

D TYPE		MODEL	PRODUCT DESCRIPTION	CASE TYPE	CASE DIMENSIONS (mm)	COVER OPTIONS
INTED	2" Flat Hose	DRS2420.2ST_	2"-20m Flat Hosed, Double Cover, Double Tubed Fire Cabinet	Surface Mounted	760x1530x200	- T1,T2,T3,T4
MOUI		DRS2430.2ST_	2"-30m Flat Hosed, Double Cover, Double Tubed Fire Cabinet		760x1530x200	
ACE:	2 ½" Flat Hose	DRS2420.3ST_	2½"-20m Flat Hosed, Double Cover, Double Tubed Fire Cabinet	Surface Mounted	760x1530x220	- T1,T2,T3,T4
SURFACE		DRS2430.3ST_	21/2"-30m Flat Hosed, Double Cover, Double Tubed Fire Cabinet		760x1530x220	









