




DOORAS
FIRE FIGHTING EQUIPMENT

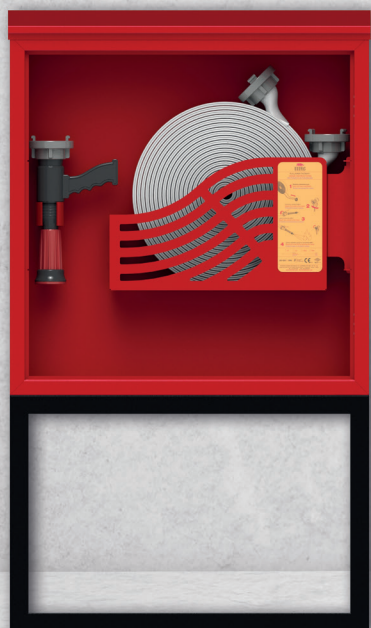

DRS 3100-3500 SERIES

www.dooras.com

DRS 3100 - 3500 SERIES



(Optionally, there is an aluminum controlled lance option. TS 3145 Certificated)



DRS 3100 - 3500

INTERNAL MATERIALS

- Flat Fire Hose, TS 9222 Certificated
- 2" Hose Union (Aluminum - Storz Type), TS 12258 Certificated
- Movable hose basket with 90° angle of motion
- "Swivel Head Controlled Lance" with Jet, Spray and Off positions (EN 671-2 compliant)
- 6Kg, Dry Chemical Powder Fire Extinguisher Tube (ABC Class) TS862-7 EN3 Certificated
- Hose Basket Phosphate Coating, Completely Electrostatic Powder Painted.
- Optionally Provided Union and Hydrant Key
- Products are shipped with cardboard packaging after tested hundred percent.
- Optionally, there is an aluminum controlled lance option. TS 3145 Certificated
- All Hose Connections are done with Special Press Method. Clamp etc. is never used.
- All hose connections are covered with plastic to prevent the damage to user.
- 2.5" Option is offered in all products.

DISASSEMBLED COVER

- A1 Quality Galvanized Sheet Metal Production, Disassembled Sheet Metal or Glass Cover
- Recessed Handle Lock (Corrosion Resistant - Stainless)
- Manufactured of Stainless CrNi Material, Leaf Hinge System
- Warning Signs and Signs in ISO 7010 Standards on the Cover (Tear-Free and Nonfading)
- Cover is Red Electrostatic Powder Painted.
- Optional Design Options are available. (Suitable for customer requests)
- Optional, Completely Stainless CrNi Material Options are available.

PRODUCT TECHNICAL SPECIFICATIONS

CASE

- A1 Quality Manufactured from Galvanized Sheet Metal as One-Piece
- Vertically Positioned 1 piece 6kg Fire Tube Capable Capacity
- Case Design Suitable for Right and Left Handed Hose Baskets
- Reinforced, Hose Basket Carrier Console
- Mounting, Ventilation and Water Drain Holes
- Case is Red Electrostatic Powder Painted.
- Optional Design Options are available. (Suitable for customer requests)
- Optional, Completely Stainless CrNi Material Options are available.

FOOT


- Special Hydrant Cabinet Foot Manufactured from Box Profile
- Mounting Tabs Providing Foot Mounting on Concrete Floor
- Foot Phosphate Coating, Black Electrostatic Powder Painted.
- Optional Design Options are available. (Suitable for customer requests)
- Optional, Completely Stainless CrNi Material Options are available.

ROOF


- A1 Quality Galvanized Sheet Metal Manufactured Roof
- Forward and Backward Sloping Roof Design
- Roof is Red Electrostatic Powder Painted.
- Optional Design Options are available. (Suitable for customer requests)
- Optional, Completely Stainless CrNi Material Options are available.

DRS 3100-3500 FIRE HYDRANT CABINETS WITH LAY FLAT HOSE - WITH 1 SET OF ACCESSORIES

DRS 3100

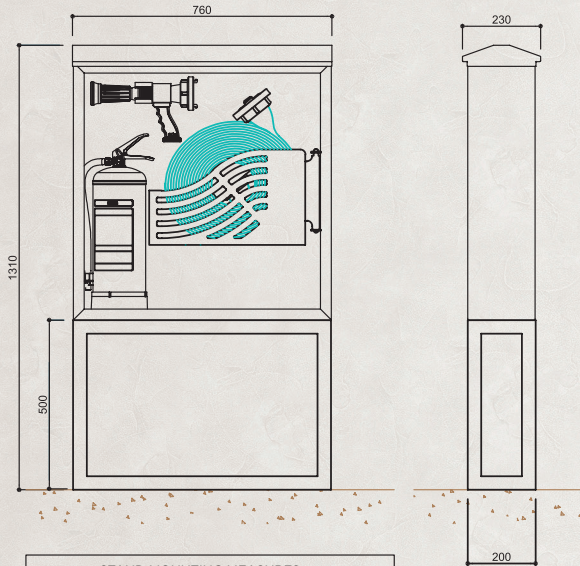


STAND MOUNTING MEASURES




GROUND MOUNTING HOLES ARE SUITABLE FOR FIXING WITH M8 STEEL RAWLPLUGS

DRS 3500

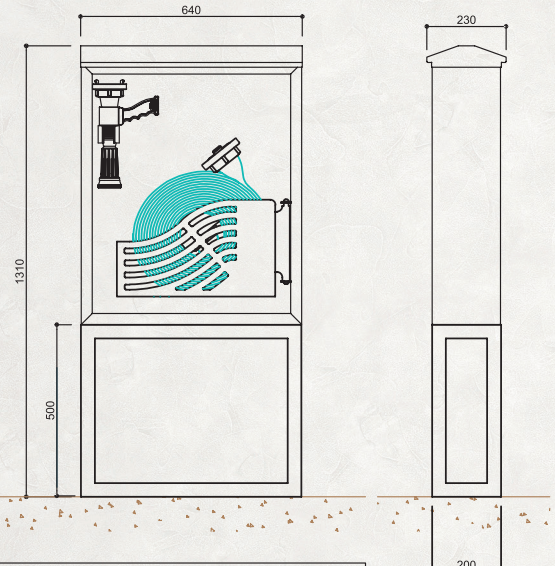

STAND MOUNTING MEASURES

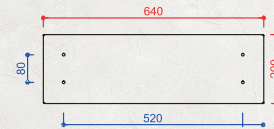

GROUND MOUNTING HOLES ARE SUITABLE FOR FIXING WITH M8 STEEL RAWLPLUGS

OUTDOOR

	MODEL	PRODUCT DESCRIPTION	PRODUCT TYPE	CASE DIMENSIONS (mm)
2" Flat Hose	DRS3120.2ST_	2"-20m Flat Hose, Single Cover, Tubed, Outdoor Fire Cabinet	OUTDOOR	760x1310x230
	DRS3130.2ST_	2"-30m Flat Hose, Single Cover, Tubed, Outdoor Fire Cabinet		760x1310x230
	DRS3120.3ST_	2½"-20m Flat Hose, Single Cover, Outdoor Fire Cabinet		760x1310x230
	DRS3130.3ST_	2½"-30m Flat Hose, Single Cover, Outdoor Fire Cabinet		760x1310x230

2 ½" FLAT HOSE CABINETS DO NOT HAVE TUBE OPTION.

OUTDOOR

	MODEL	PRODUCT DESCRIPTION	PRODUCT TYPE	CASE DIMENSIONS (mm)
2 ½" Flat Hose	DRS3520.2ST_	2"-20m Flat Hosed, Single Cover, Tubeless, Outdoor Fire Cabinet	OUTDOOR	640x1310x230
	DRS3530.2ST_	2"-30m Flat Hosed, Single Cover, Tubeless, Outdoor Fire Cabinet		640x1310x230
	DRS3520.3ST_	2½"-20m Flat Hosed, Single Cover, Tubeless, Outdoor Fire Cabinet		640x1310x230
	DRS3530.3ST_	2½"-30m Flat Hosed, Single Cover, Tubeless, Outdoor Fire Cabinet		640x1310x230

2 ½" FLAT HOSE CABINETS DO NOT HAVE TUBE OPTION.

NOTE: IF YOUR HOSES ARE 2" and HYDRANT IS DN100 (OUTLETS 2½") YOU HAVE TO USE 2½"x2" REDUCTION TO CONNECT THE HOSE TO HYDRANT. DO NOT FORGET TO INFORM YOUR DN100 HYDRANT USE TO OUR SALES REPRESENTATIVE

DOORAS A.Ş. reserves the right to make modifications on the products without notification.





DOORAS
FIRE FIGHTING EQUIPMENT

